

**1-Line, Bi-directional, Transient Voltage Suppressors**


---

**Descriptions**


The ESD3V3A005TA is a bi-directionalTVS (Transient Voltage Suppressor). It is specifically designed to protect sensitive electronic components that may be subjected to ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning. It is particularly well-suited for cellular phones, portable device, digital cameras, power supplies and many other portable applications because of its small package and low weight.

The ESD3V3A005TA may be used to provide ESD protection up to  $\pm 30\text{kV}$  air discharge  $\pm 30\text{kV}$  contact discharge according to IEC61000 - 4 - 2 , and withstand peak pulse current up to 20A (8/20 $\mu\text{s}$  ) according to IEC61000-4-5.

The ESD3V3A005TA is available in SOD-323 package. Standard products are Pb-free and Halogen-free.

**SOD-323**

---

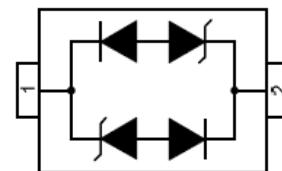**Circuit diagram**

---

**Features**

- Stand-off voltage:  $\pm 3.3\text{V}$  Max
- Transient protection for each line according to
  - IEC61000-4-2 (ESD):  $\pm 30\text{kV}$  air discharge  $\pm 30\text{kV}$  contact discharge
  - IEC61000-4-5 (surge): 20A(8/20 $\mu\text{s}$ )
- Solid-state silicon technology

**Order information****Applications**

- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Digital Cameras
- MID/CAR DVD/MP3/MP4/PMP Players


Device	Package	Shipping	Mark
ESD3V3A005TA	SOD-323	3000/Tape&Reel	CC






**Absolute maximum ratings**

Parameter	Symbol	Rating	Unit
Peak pulse current ( $t_p = 8/20\mu s$ )	$I_{PP}$	20	A
ESD according to IEC61000-4-2 air discharge	$V_{ESD}$	$\pm 30$	kV
ESD according to IEC61000-4-2 contact discharge		$\pm 30$	
Operation junction temperature	$T_J$	-55~150	°C
Lead temperature	$T_L$	260	°C
Storage temperature	$T_{STG}$	-55~150	°C






**Electrical characteristics (TA=25 °C ,unless otherwise noted)**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	$V_{RWM}$				$\pm 3.3$	V
Reverse leakage current	$I_R$	$V_{RWM} = 3.3V$			0.1	$\mu A$
Reveres breakdown voltage	$V_{BR}$	$I_T = 1mA$	4.0	5.5		V
Clamping voltage	$V_C$	$I_{PP} = 1A \text{ tp}=8/20\mu s$			9.0	V
		$I_{PP} = 20A \text{ tp}=8/20\mu s$		18.0	20.0	V
Junction capacitance	$C_J$	$V_R = 0V, f = 1MHz$		0.5	1.0	pF

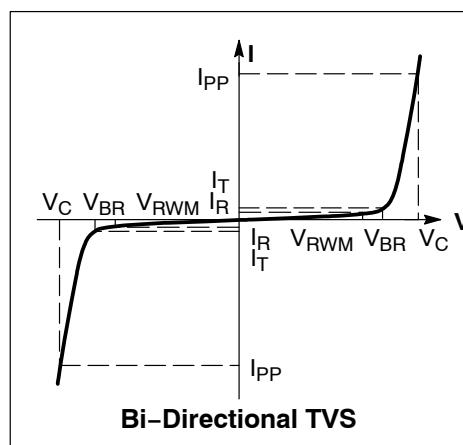**Electrical performance curve** $V_C$  : Maximum clamping voltage $V_{br}$  : Reverse breakdown voltage $V_{RWM}$  : Working voltage $I_{PP}$  : Maximum peak current

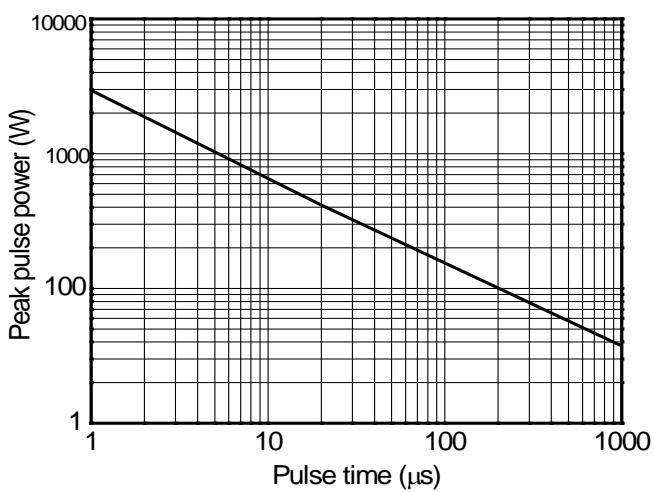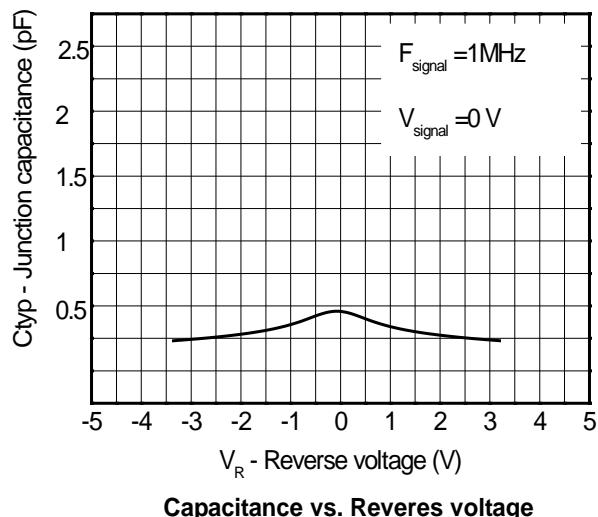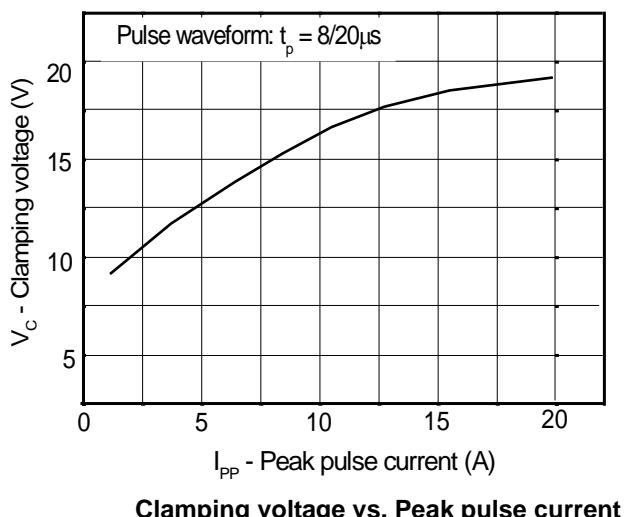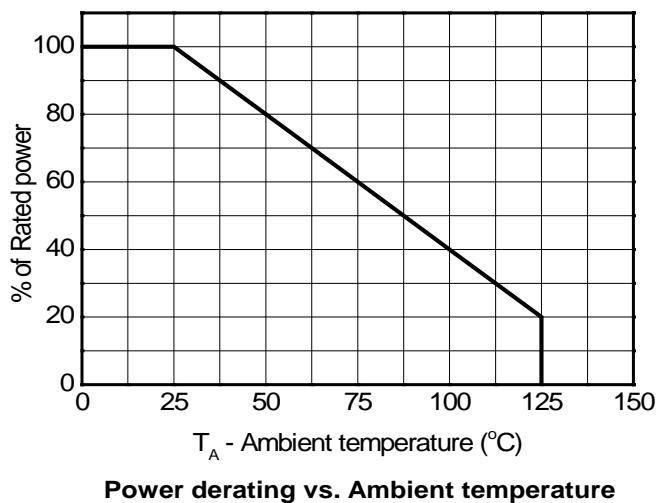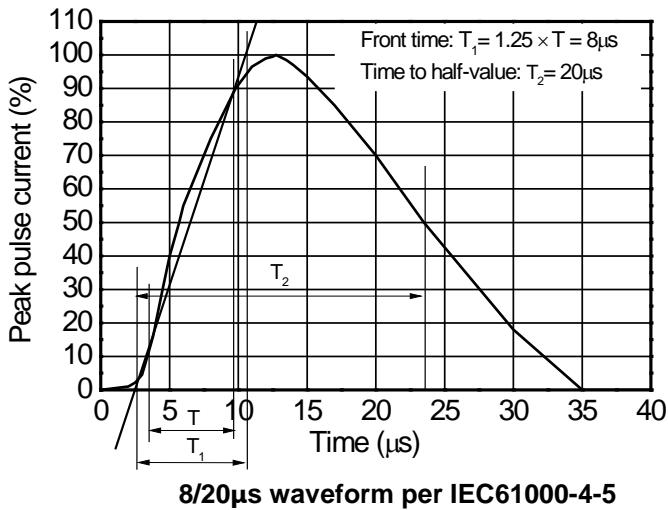


## ESD clamping test setup and waveforms

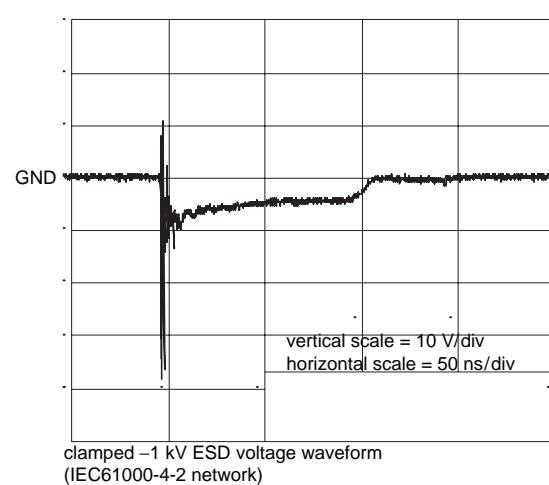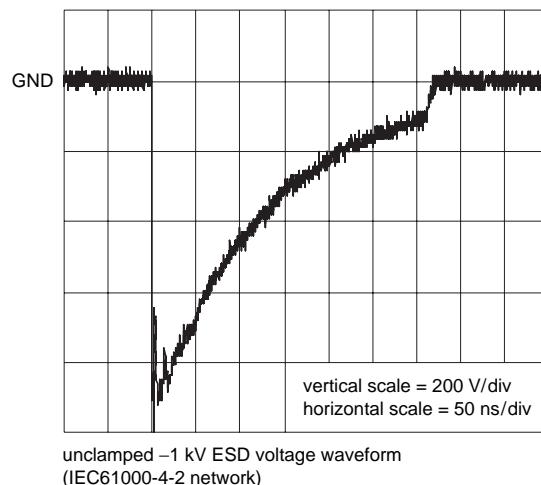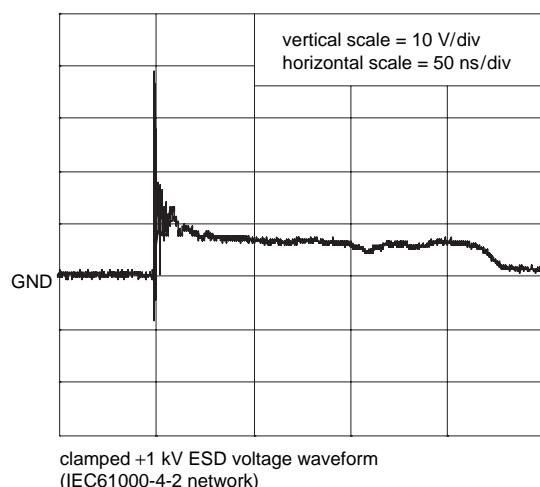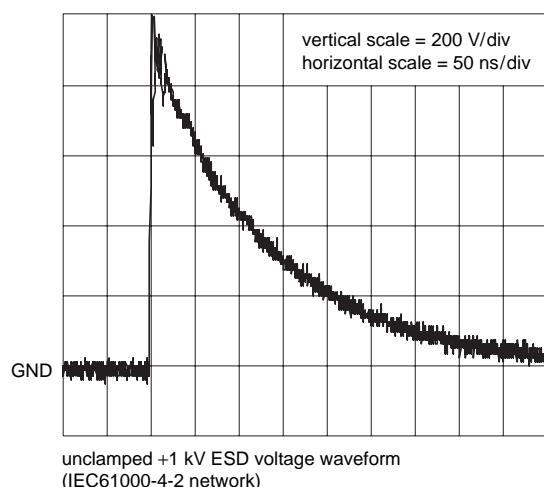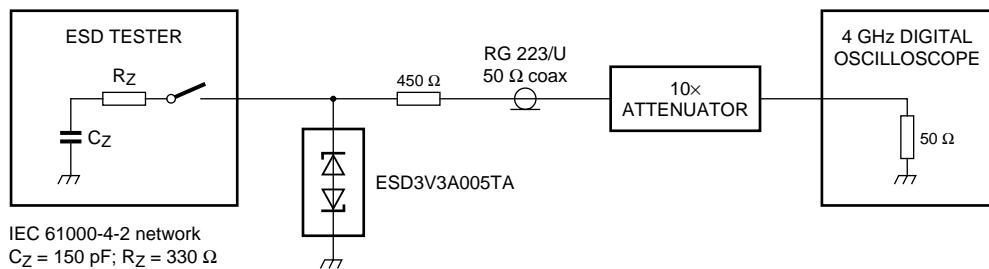


## Package outline dimensions

## SOD-323

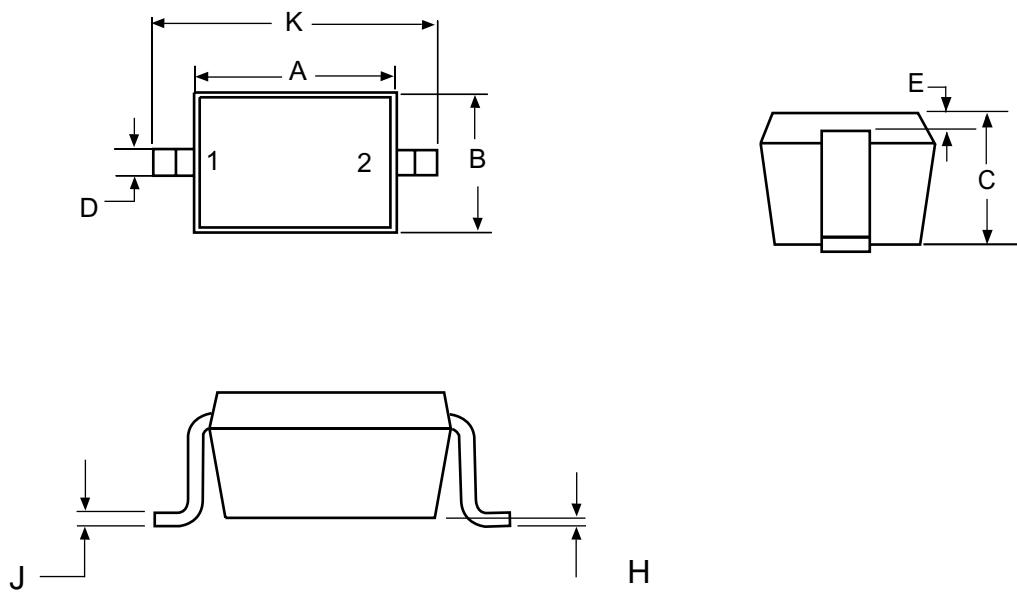

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.60	1.80	0.063	0.071
B	1.15	1.35	0.045	0.053
C	0.80	1.00	0.031	0.039
D	0.25	0.40	0.010	0.016
E	0.15 REF		0.006 REF	
H	0.00	0.10	0.000	0.004
J	0.089	0.177	0.0035	0.0070
K	2.30	2.70	0.091	0.106

## Recommend land pattern (Unit: mm)

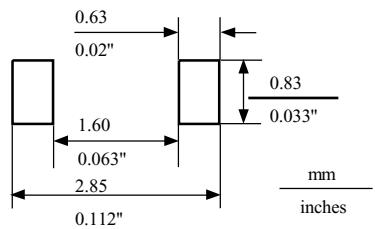

Note: This land pattern is for your reference only. Actual pad layouts may vary depending on application.