


**1-Line, Uni -directional, Transient Voltage Suppressors**

---


**Descriptions**

The ESD12A211TRP is a uni-directional TVS (Transient Voltage Suppressor). It is specifically designed to protect sensitive electronic components that may be subjected to ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning. It is particularly well-suited for cellular phones, portable device, digital cameras, power supplies and many other portable applications because of its small package and low weight.

The ESD12A211TRP is available in SOD-323 package. Standard products are Pb-free and Halogen-free.

**SOD-323**

---

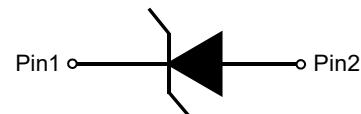**Circuit diagram**

---

**Features**

- Stand-off voltage: 12 VMax
- Transient protection for each line according to
  - IEC61000-4-2 (ESD):  $\pm 30\text{kV}$  air discharge    $\pm 30\text{kV}$  contact discharge
  - IEC61000-4-5 (surge): 50A(8/20 $\mu\text{s}$ )
- Solid-state silicon technology

**Order information****Applications**

- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Digital Cameras
- MID/CAR DVD/MP3/MP4/PMP Players

Device	Package	Shipping	Mark
ESD12A211TRP	SOD-323	3000/Tape&Reel	QS

### Absolute maximum ratings


Parameter	Symbol	Rating	Unit
Peak pulse current ( $t_p = 8/20\mu s$ )	$I_{PP}$	50.0	A
ESD according to IEC61000-4-2 air discharge	$V_{ESD}$	$\pm 30$	kV
ESD according to IEC61000-4-2 contact discharge		$\pm 30$	
Operation junction temperature	$T_J$	-55~150	°C
Lead temperature	$T_L$	260	°C
Storage temperature	$T_{STG}$	-55~150	°C






### Electrical characteristics (TA=25 °C ,unless otherwise noted)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Reverse stand-off voltage	$V_{RWM}$				12.0	V
Reverse leakage current	$I_R$	$V_{RWM} = 12 V$			0.5	µA
Reveres breakdown voltage	$V_{BR}$	$I_T=1mA$	13.5			V
Clamping voltage	$V_C$	$I_{PP}=1A \text{ tp}=8/20\mu s$			17.0	V
		$I_{PP}=50A \text{ tp}=8/20\mu s$			25.0	V
Junction capacitance	$C_J$	$V_R = 0V, f = 1MHz$		100.0	250.0	pF






### Electrical performance curve

Symbol	Parameter
$V_{RWM}$	Peak Reverse Working Voltage
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

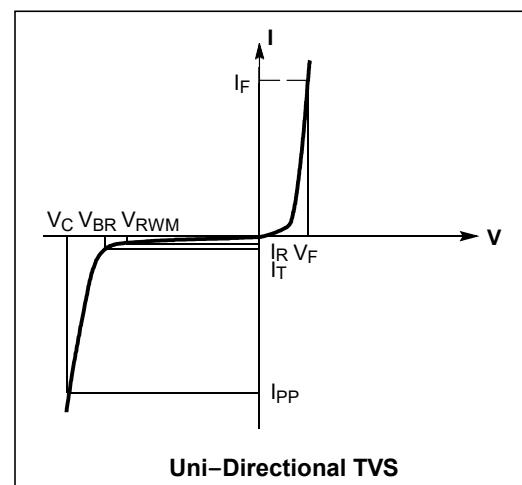

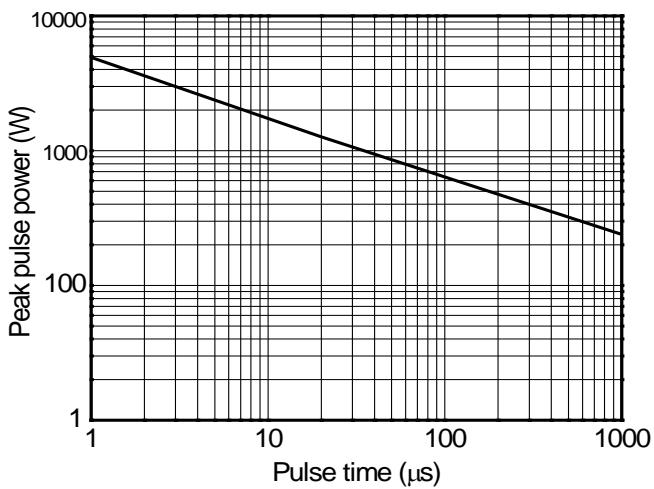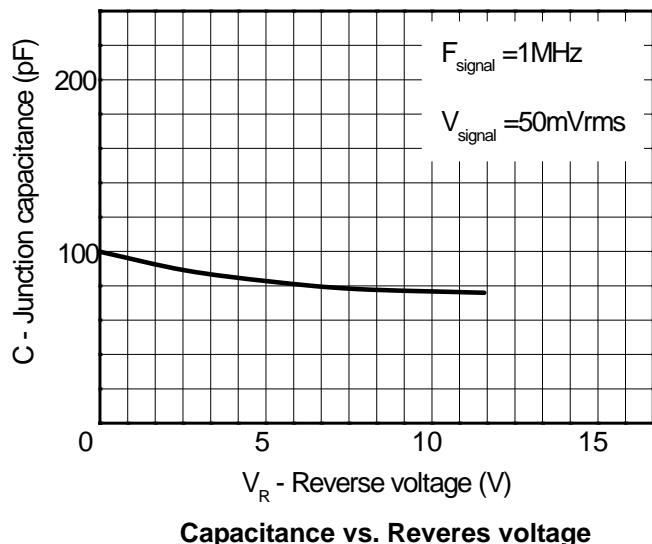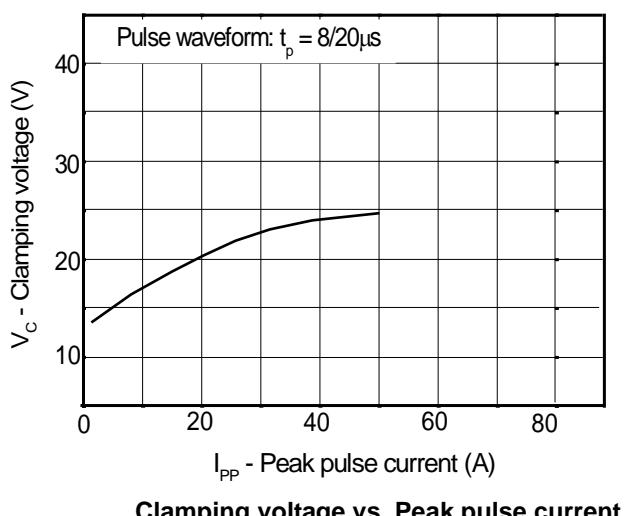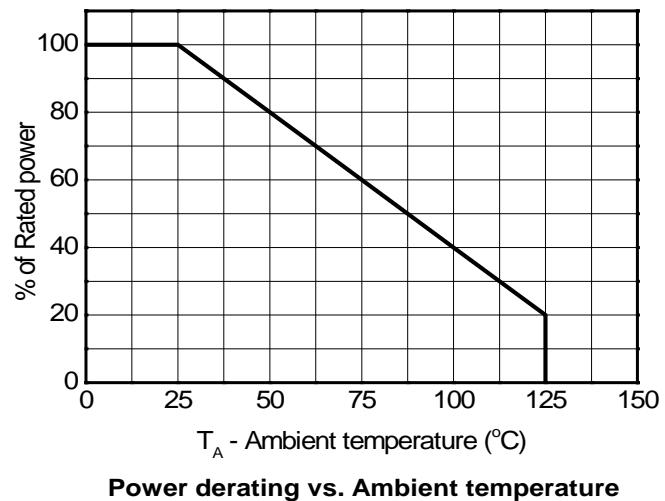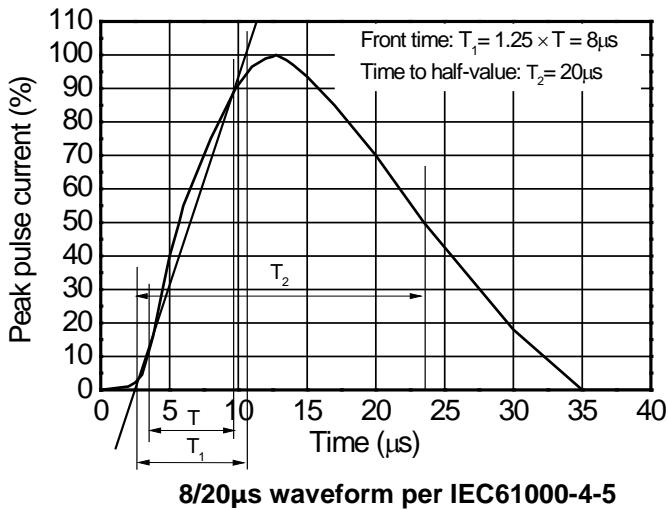


## ESD clamping test setup and waveforms

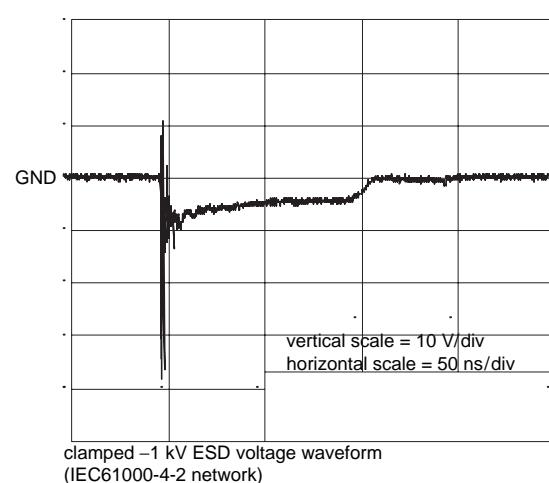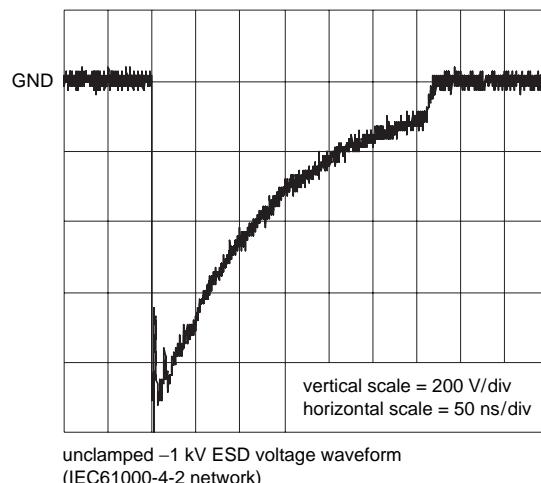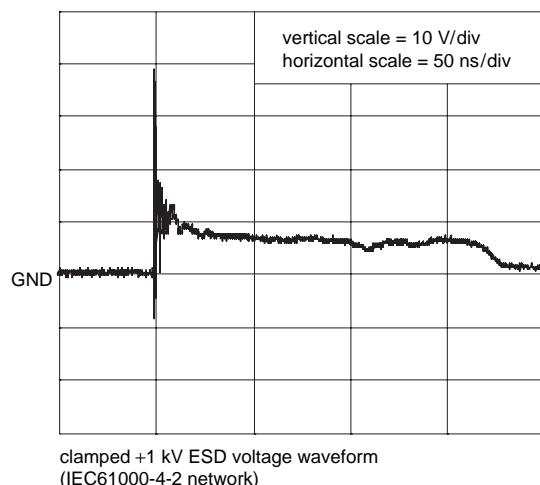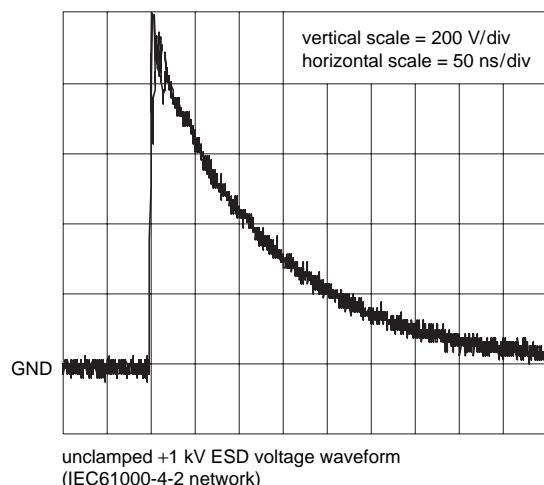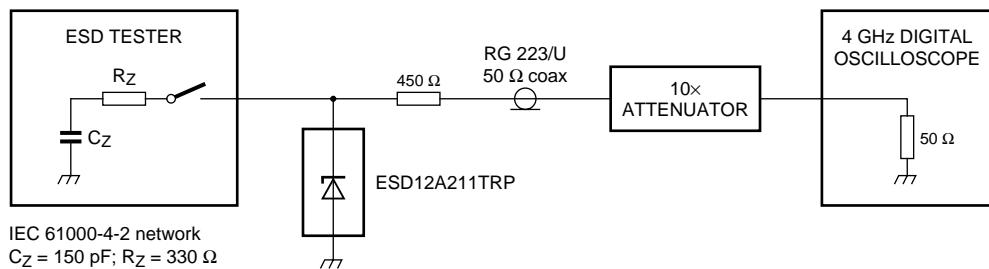


## Package outline dimensions

## SOD-323

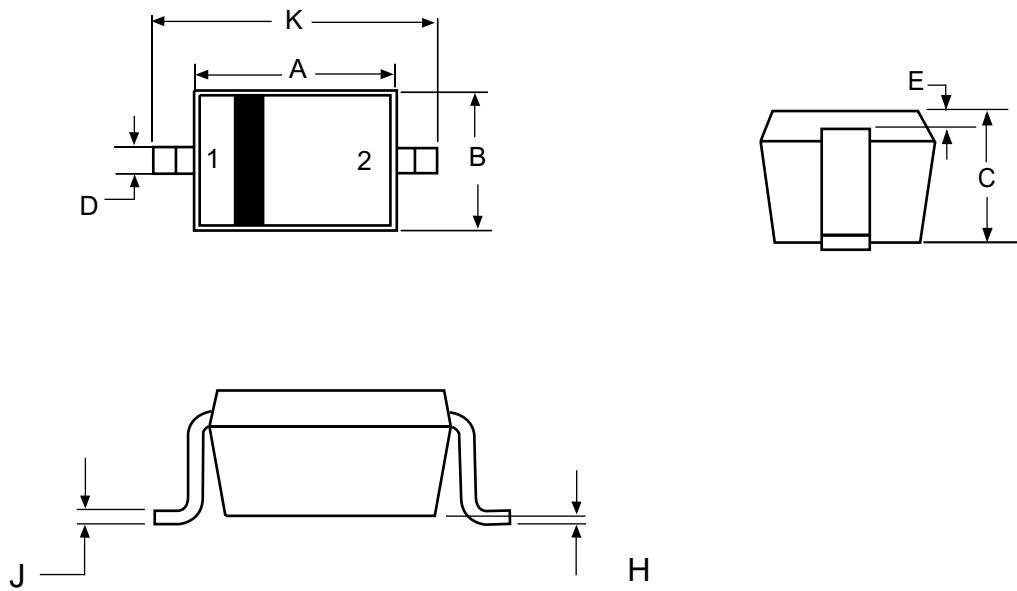

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.60	1.80	0.063	0.071
B	1.15	1.35	0.045	0.053
C	0.80	1.00	0.031	0.039
D	0.25	0.40	0.010	0.016
E	0.15 REF		0.006 REF	
H	0.00	0.10	0.000	0.004
J	0.089	0.177	0.0035	0.0070
K	2.30	2.70	0.091	0.106

## Recommend land pattern (Unit: mm)

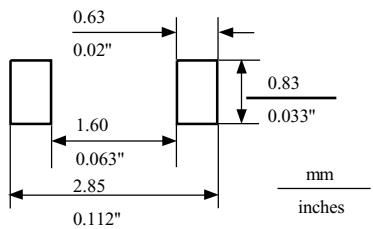

*Note: This land pattern is for your reference only. Actual pad layouts may vary depending on application.*