



Description

- ◆ The common mode filter is mainly used to reduce radiation and high frequency common mode noise.
- ◆ Reduce asymmetric interference on data lines and other interfaces.
- ◆ Impedance characteristics match the impedance of most differential interface Settings, controlling unnecessary reflection formation
- ◆ Low leakage, no effect on differential mode current

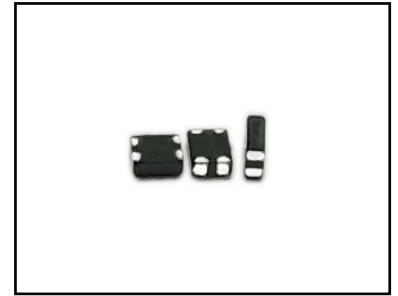

Features

- ◆ Size:0.85mm*0.65mm*0.45mm
- ◆ Halogen free ,Lead free ,Reach and RoHs
- ◆ USB2.0,LCD,MIPI

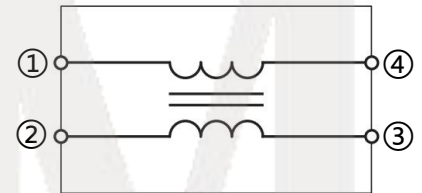

Circuit Diagram

Application

- ◆ Cellular phones
- ◆ Portable devices
- ◆ Digital cameras
- ◆ Player
- ◆ Smart home
- ◆ Robot

PIN NUMBER	DESCRIPTION
① ~ ④	DATE LINE
② ~ ③	DATE LINE

Order information

Model	Marking	Package	shipping
CMF0806DH900MFR		0806	10000Tape&Reel

Part Numbering

CMF	0806	DH	900	M	F	R
A	B	C	D	E	F	G

A:ASIM common mode filter

B:Dimension

C:Ordinary high speed differential signal

D:Common Mode Impedance (at 100MHz), 900= 90Ω

E:Tolerance of common mode impedance, M= ±20%

F:Type of electrode plating: F= Lead Free


G:Packing Type, R= Reel

Specification


Part number	Common mode impedance(Ω) @100MHz	Rated Current (mA)	DC Resistance (Ω) max
CMF0806DH900MFR	90±20%	100	5.0
	Rated volt (Vdc)	Withstand volt (Vdc)	IR (Ω) min
	5	10	10M
	Operation junction temperature	Lead temperature	Storage temperature*
	-40°C~+85°C	260°C	-40°C~85°C

*The storage temperature is subject to the fixed substrate


Performance Curves

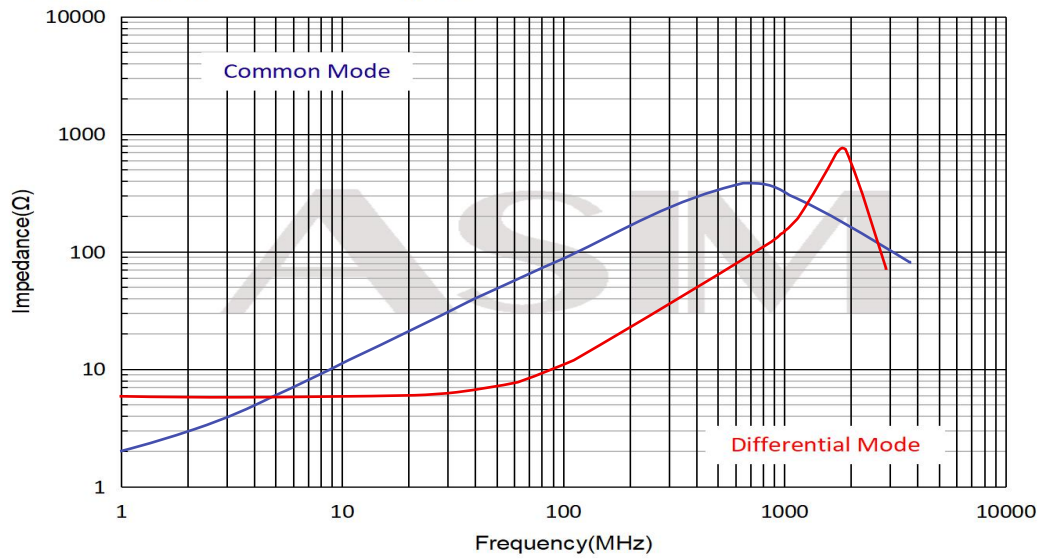

Transmission Characteristics

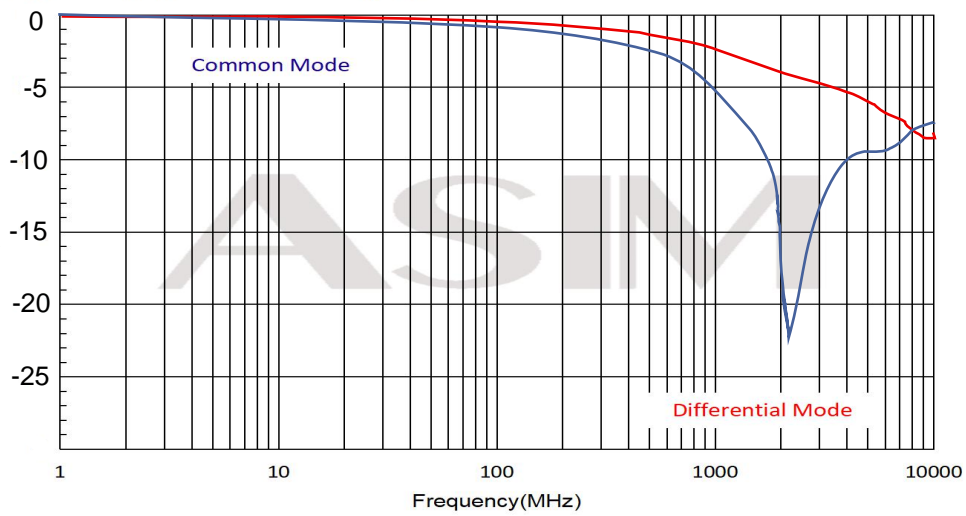


Dimension (mm)

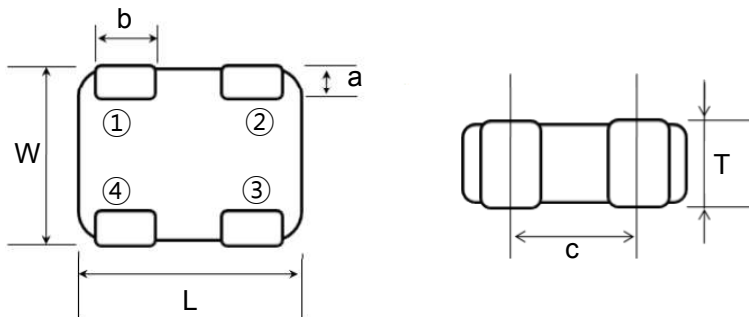


Symbol	L	W	T	a	b	c
Dimension	0.85±0.05	0.65±0.05	0.45±0.05	0.13±0.05	0.27±0.05	0.5±0.05

Recommended Land Pattern (mm)

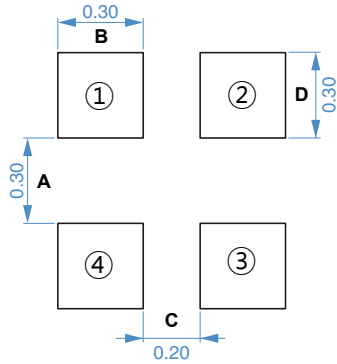


Symbol	A	B	C	D
Dimension	0.30	0.30	0.20	0.30

Recommended Reflow Profile

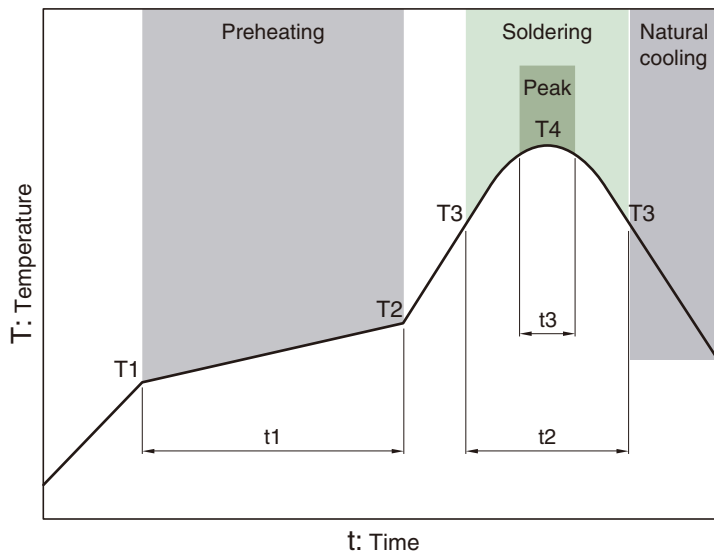


Preheating			Soldering		Peak	
Temp.	Temp.	Time	Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3
150°C	180°C	60 to 120s	230°C	25 to 35s	250°C	5s

Reel Dimension & Tape Dimension (mm)

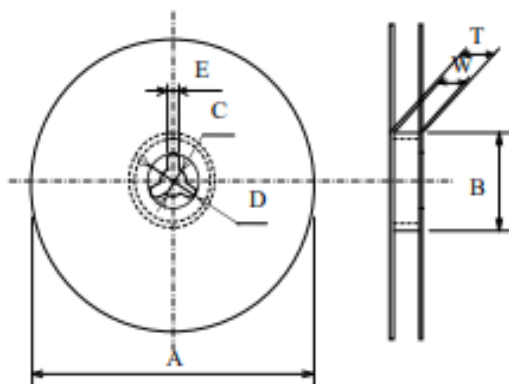

A	180.0+0/-3
B	60.0+1/-0
C	13.0±0.2
D	21.0±0.8
E	2.0±0.5
W	9.0±0.3
T	11.4±1.0

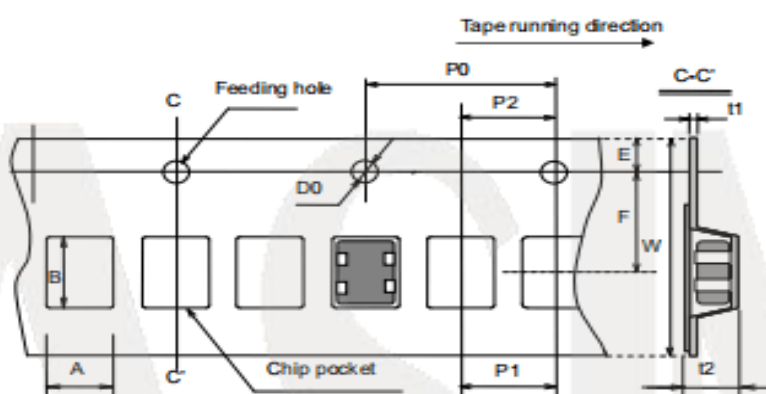

A	B	W	F	E	P1	P2	P0
0.75±0.1	0.95±0.1	8.0±0.2	3.5±0.05	1.75±0.1	2.0±0.1	2.0±0.1	4.0±0.1
D0	t1	t2					
1.5+0.1/-0	0.25±0.05	0.85±0.15					