


## 1-Line, Bi-directional, Transient Voltage Suppressors

### Descriptions


The ESD12D080TA is a bi-directional TVS (Transient Voltage Suppressor). It is specifically designed to protect sensitive electronic components that may be subjected to ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning. It is particularly well-suited for cellular phones, portable device, digital cameras, power supplies and many other portable applications because of its small package and low weight.

The ESD12D080TA may be used to provide ESD protection up to  $\pm 15\text{KV}$  Air,  $\pm 8\text{KV}$  contact compliance to IEC61000 -4-2 , and withstand peak pulse current up to 8 A (8/20 $\mu\text{s}$ ) according to IEC61000-4-5.

The ESD12D080TA is available in SOD-882 package. Standard products are Pb-free and Halogen-free.



SOD882



Circuit diagram

### Features

- Stand-off voltage:  $\pm 12\text{V}$  Max
- Transient protection for each line according to IEC61000-4-2 (ESD):  $\pm 15\text{KV}$  Air,  $\pm 8\text{KV}$  contact IEC61000-4-4(EFT): 40 A (5/50 ns) IEC61000-4-5 (Surge): 8 A (8/20 $\mu\text{s}$ )
- Solid-state silicon technology

### Applications

- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Digital Cameras
- CAR/MID DVD/MP3/MP4/PMP Players

### Order information

| Device      | Marking | Package | Shipping        |
|-------------|---------|---------|-----------------|
| ESD12D080TA | AA      | SOD-882 | 10000/Tape&Reel |

### Absolute maximum ratings

| Parameter                                       | Symbol    | Rating   | Unit        |
|---|-----------|----------|-------------|
| Peak pulse current ( $t_p = 8/20\mu s$ )        | $I_{PP}$  | 8        | A           |
| ESD according to IEC61000-4-2 air discharge     | $V_{ESD}$ | $\pm 15$ | kV          |
| ESD according to IEC61000-4-2 contact discharge |           | $\pm 8$  |             |
| Operation junction temperature                  | $T_J$     | -50~125  | $^{\circ}C$ |
| Lead temperature                                | $T_L$     | 260      | $^{\circ}C$ |
| Storage temperature                             | $T_{STG}$ | -65~150  | $^{\circ}C$ |

### Electrical characteristics (TA=25 $^{\circ}C$ , unless otherwise noted)

| Parameter                 | Symbol     | Condition                       | Min. | Typ. | Max.       | Unit    |
|---------------------------|------------|---------------------------------|------|------|------------|---------|
| Reverse stand-off voltage | $V_{RWM}$  |                                 |      |      | $\pm 12.0$ | V       |
| Reverse leakage current   | $I_R$      | $V_{RWM} = 12V$                 |      |      | 0.5        | $\mu A$ |
| Reverse breakdown voltage | $V_{BR12}$ | $I_T = 1mA$                     | 13.0 |      |            | V       |
| Clamping voltage          | $V_C$      | $I_{pp} = 1A$ $t_p = 8/20\mu s$ |      |      | 16.0       | V       |
|                           |            | $I_{pp} = 8A$ $t_p = 8/20\mu s$ |      |      | 24.0       | V       |
| Junction capacitance      | $C_J$      | $V_R = 0V, f = 1MHz$            |      | 10.0 | 15.0       | pF      |


### Electrical performance curve

$V_C$ : Maximum clamping voltage


$V_{br}$ : Reverse breakdown voltage

$V_{RWM}$ : Working voltage


$I_{PP}$ : Maximum peak current

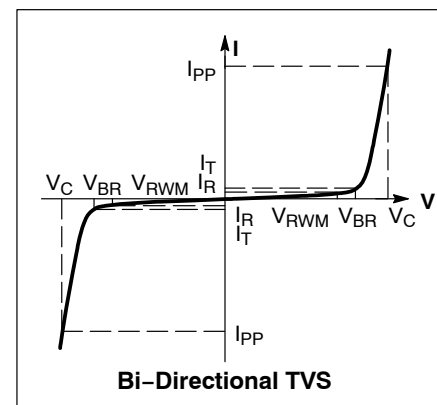


### Typical characteristics ( $T_A=25^\circ\text{C}$ , unless otherwise noted)

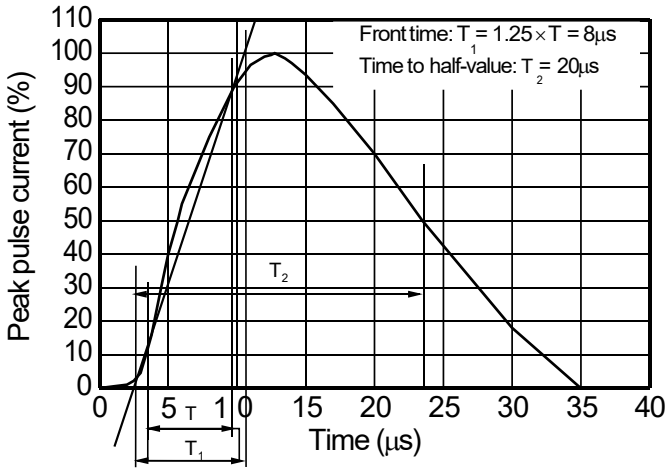


8/20 $\mu\text{s}$  waveform per IEC61000-4-5

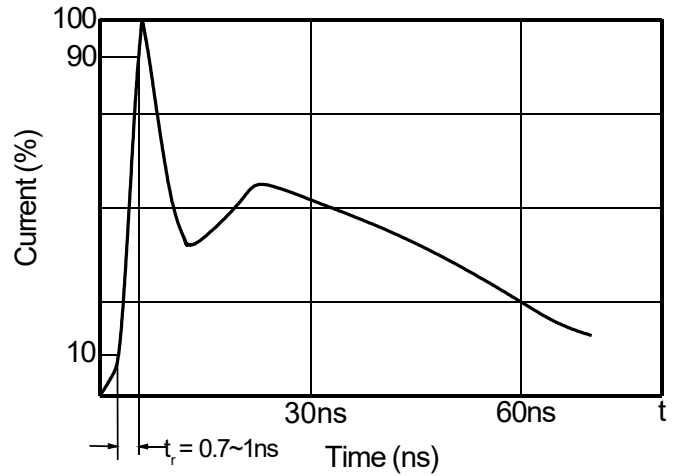


Contact discharge current waveform per IEC61000-4-2

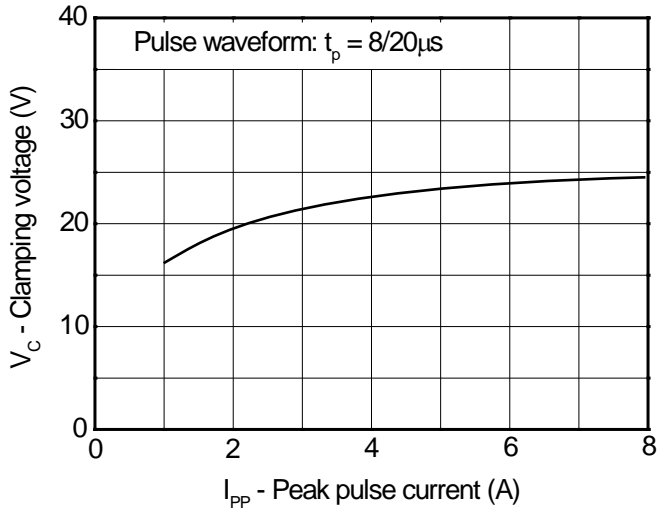


Clamping voltage vs. Peak pulse current

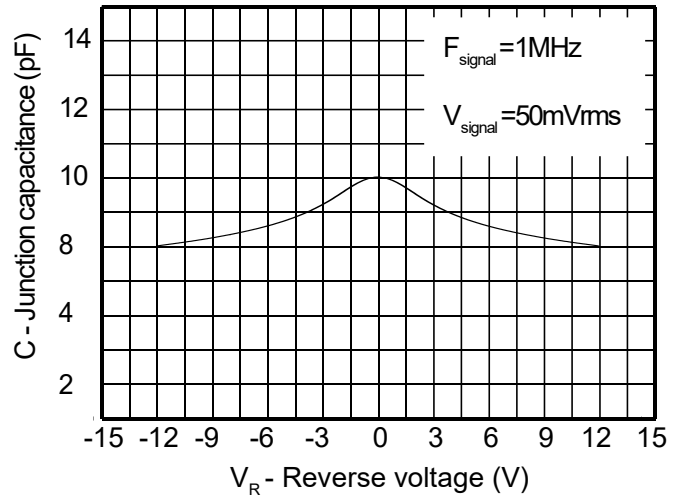


Capacitance vs. Reverse voltage

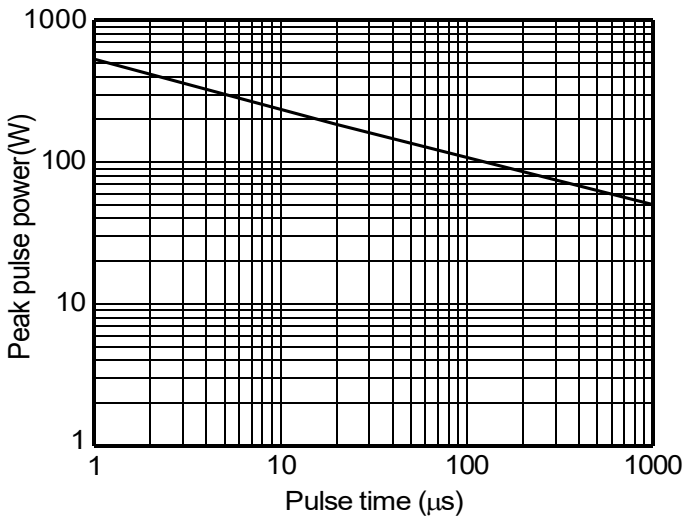


Non-repetitive peak pulse power vs. Pulse time

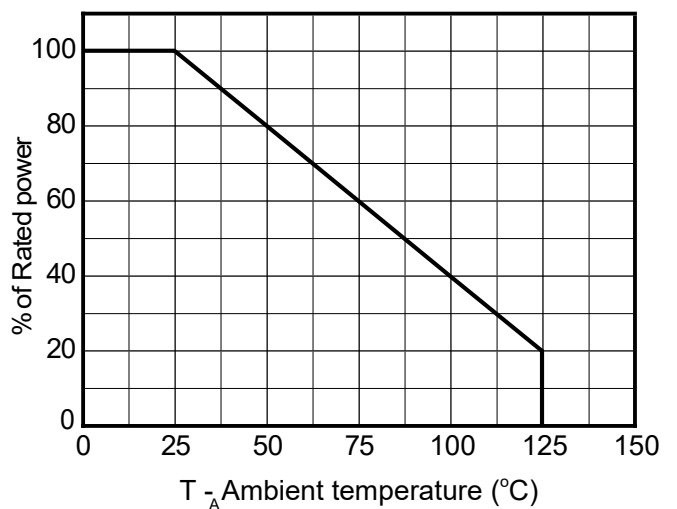

Power derating vs. Ambient temperature

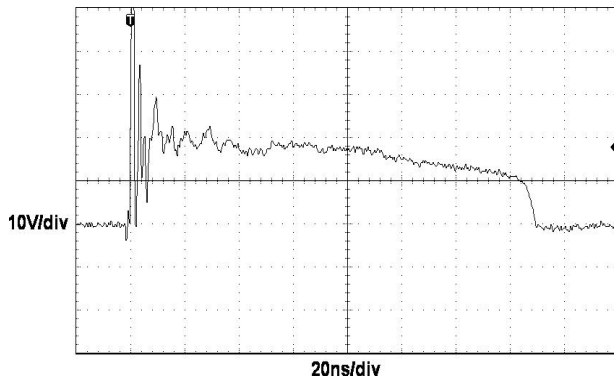

**ESD clamping**  
**(+8kV contact discharge per IEC61000-4-2)**

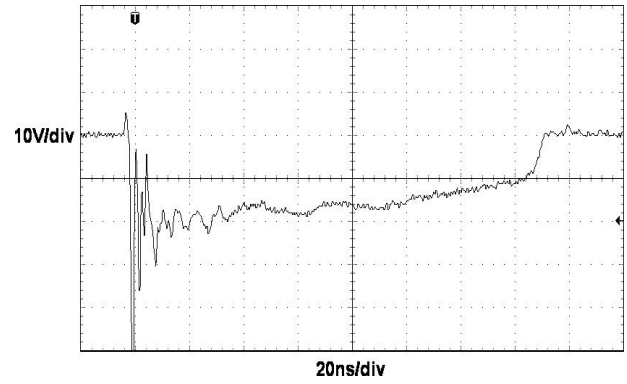


**ESD clamping**  
**(-8kV contact discharge per IEC61000-4-2)**

Package outline dimensions

SOD882

DIMENSION OUTLINE:

Unit:mm

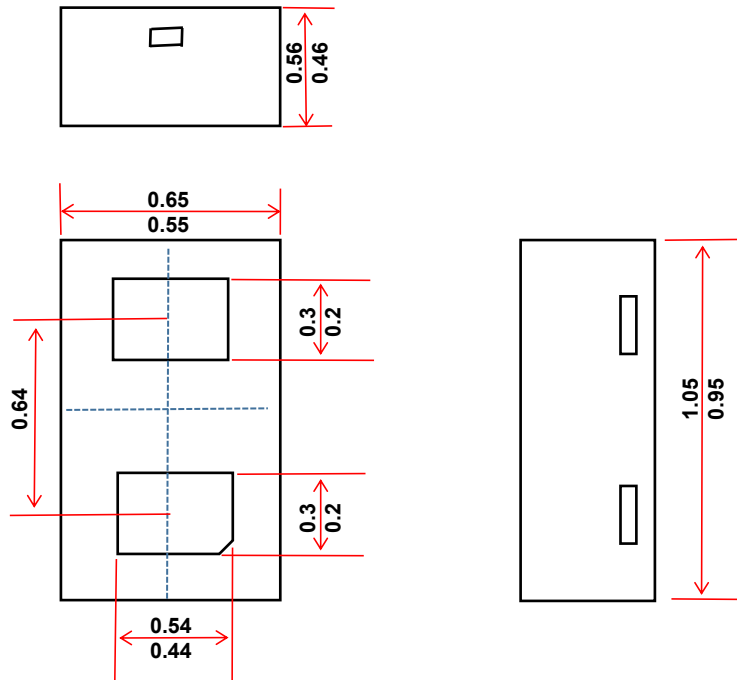

Recommended Mounting Pad Layout Unit:mm

