

## 1-Line, Bi-directional, Transient Voltage Suppressors


### Descriptions

The ESD7B100TA is a bi-directional TVS (Transient Voltage Suppressor). It is specifically designed to protect sensitive electronic components that may be subjected to ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lightning. It is particularly well-suited for cellular phones, portable device, digital cameras, power supplies and many other portable applications because of its small package and low weight.

The ESD7B100TA is available in SOD-523 package. Standard products are Pb-free and Halogen-free.



SOD-523

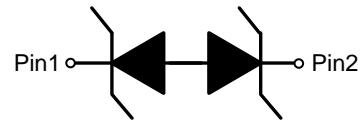

Circuit diagram

### Features

- Stand-off voltage:  $\pm 7V$  Max
- Transient protection for each line according to IEC61000-4-2 (ESD):  $\pm 30KV$  Air,  $\pm 30$  KV contact IEC61000-4-5 (Surge): 5.0A Max (8/20 $\mu s$ )
- Solid-state silicon technology
- Low leakage current

### Applications

- Cell phone handsets and accessories
- Personal Digital Assistants (PDAs)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Digital Cameras
- CAR/MID DVD/MP3/MP4/PMP Players

### Order information

| Device     | Marking | Package | Shipping       |
|------------|---------|---------|----------------|
| ESD7B100TA | 5C      | SOD-523 | 3000/Tape&Reel |

## Absolute maximum ratings

| Parameter                                       | Symbol        | Rating   | Unit        |
|---|---------------|----------|-------------|
| Peak pulse current ( $t_p = 8/20\mu s$ )        | $I_{PP\ Max}$ | 5.0      | A           |
| ESD according to IEC61000-4-2 air discharge     | $V_{ESD}$     | $\pm 30$ | kV          |
| ESD according to IEC61000-4-2 contact discharge |               | $\pm 30$ |             |
| Operating temperature                           | $T_{OP}$      | -40~85   | $^{\circ}C$ |
| Operation junction temperature                  | $T_J$         | 125      | $^{\circ}C$ |
| Lead temperature                                | $T_L$         | 260      | $^{\circ}C$ |
| Storage temperature                             | $T_{STG}$     | -55~150  | $^{\circ}C$ |

## Electrical characteristics (TA=25 $^{\circ}C$ , unless otherwise noted)

| Parameter                 | Symbol    | Condition                         | Min. | Typ. | Max.      | Unit    |
|---------------------------|-----------|-----------------------------------|------|------|-----------|---------|
| Reverse stand-off voltage | $V_{RWM}$ |                                   |      |      | $\pm 7.0$ | V       |
| Reverse leakage current   | $I_R$     | $V_{RWM} = 7V$                    |      |      | 0.5       | $\mu A$ |
| Reveres breakdown voltage | $V_{BR}$  | $I_T = 1mA$                       | 7.5  | 8.0  | 9.5       | V       |
| Clamping voltage          | $V_C$     | $I_{pp} = 1A$ $t_p = 8/20\mu s$   |      | 11.5 |           | V       |
|                           |           | $I_{pp} = 5.0A$ $t_p = 8/20\mu s$ |      | 12.0 | 13.0      | V       |
| Junction capacitance      | $C_J$     | $V_R = 0V$ , $f = 1MHz$           |      | 15.0 | 20.0      | pF      |


## Electrical performance curve

$V_C$ : Maximum clamping voltage


$V_{br}$ : Reverse breakdown voltage

$V_{RWM}$ : Working voltage


$I_{PP}$ : Maximum peak current

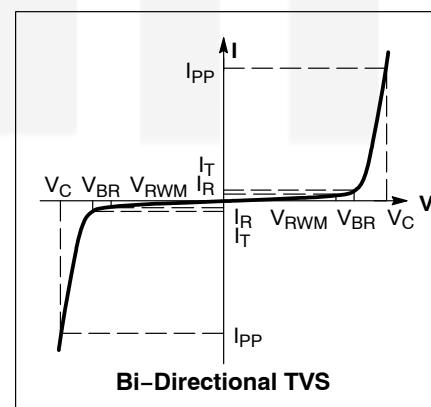


Typical characteristics ( $T_A=25^\circ\text{C}$ , unless otherwise noted)

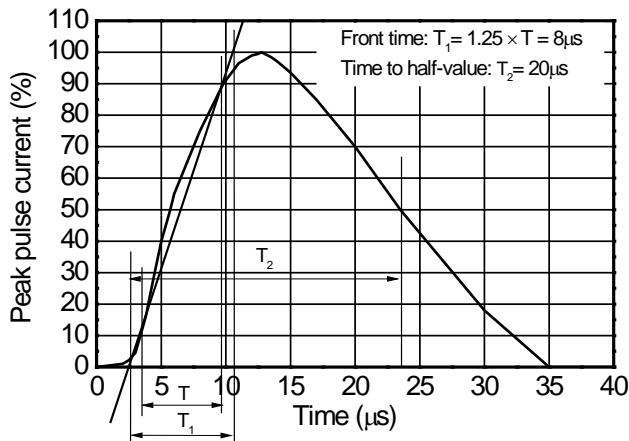


8/20 $\mu\text{s}$  waveform per IEC61000-4-5

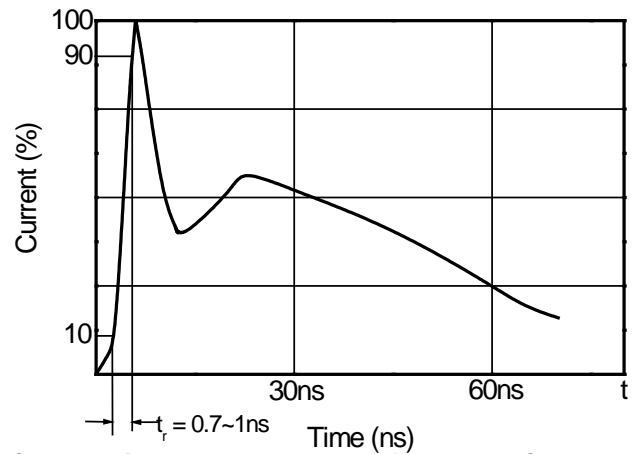


Contact discharge current waveform per IEC61000-4-2

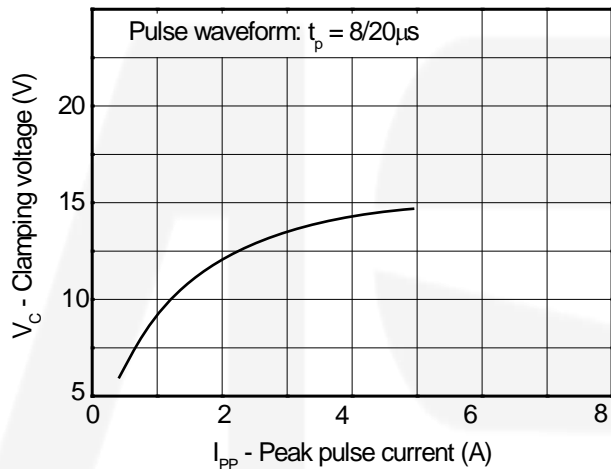


Clamping voltage vs. Peak pulse current

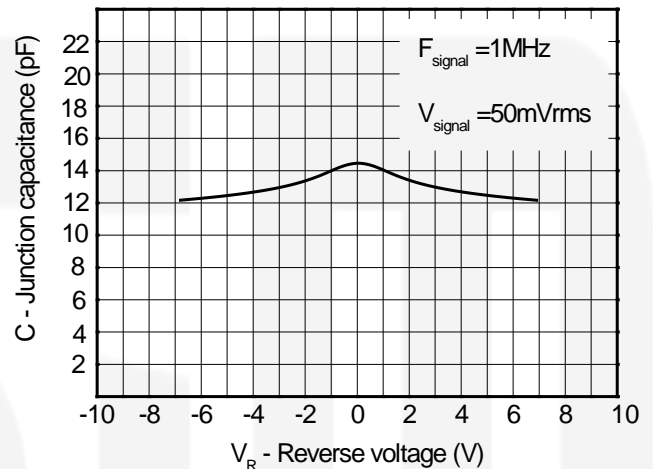

Capacitance vs. Reverses voltage


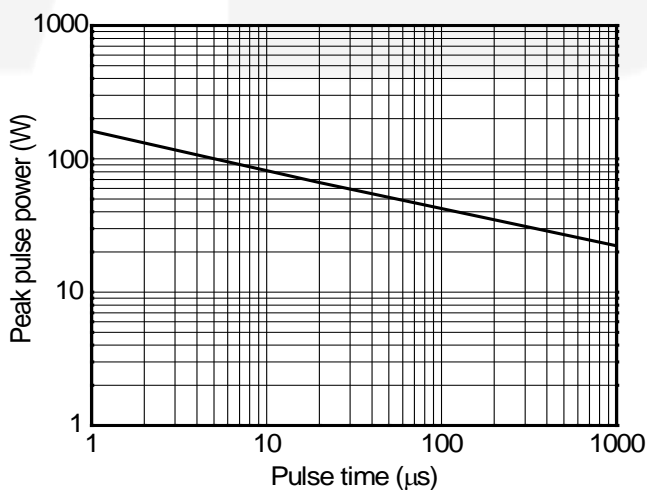


Non-repetitive peak pulse power vs. Pulse time

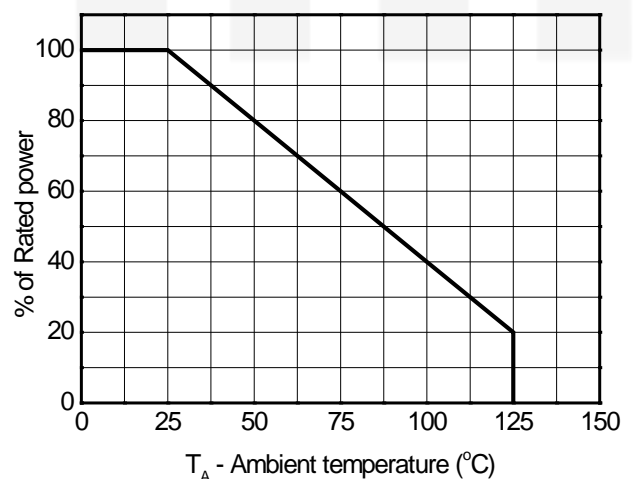


Power derating vs. Ambient temperature

ESD clamping test setup and waveforms

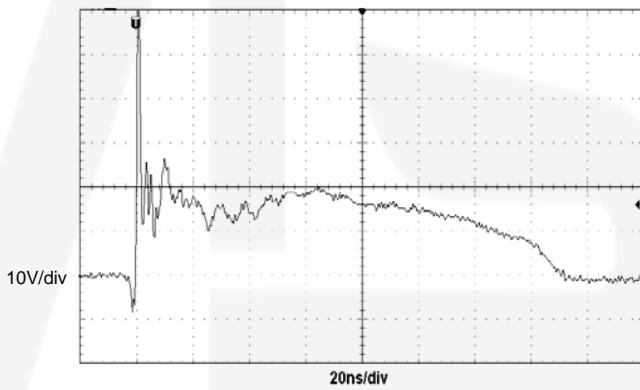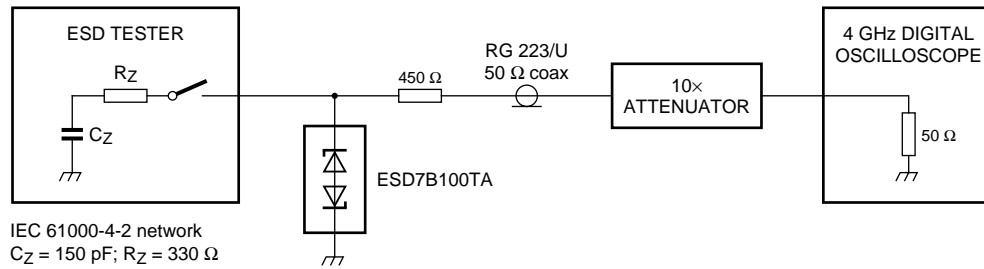


**ESD clamping**  
 (+8kV contact discharge per IEC61000-4-2)

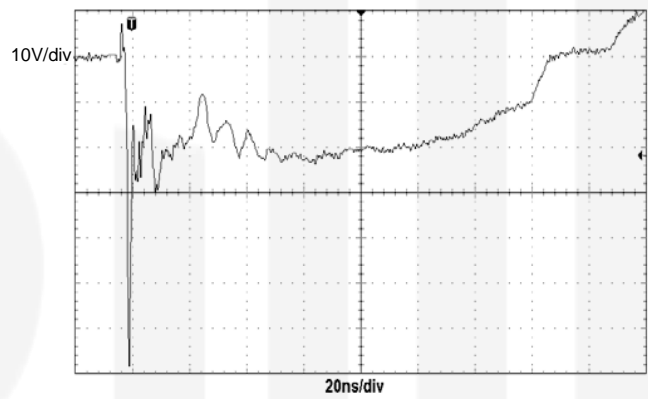

**ESD clamping**  
 (-8kV contact discharge per IEC61000-4-2)


Package outline dimensions

SOD-523

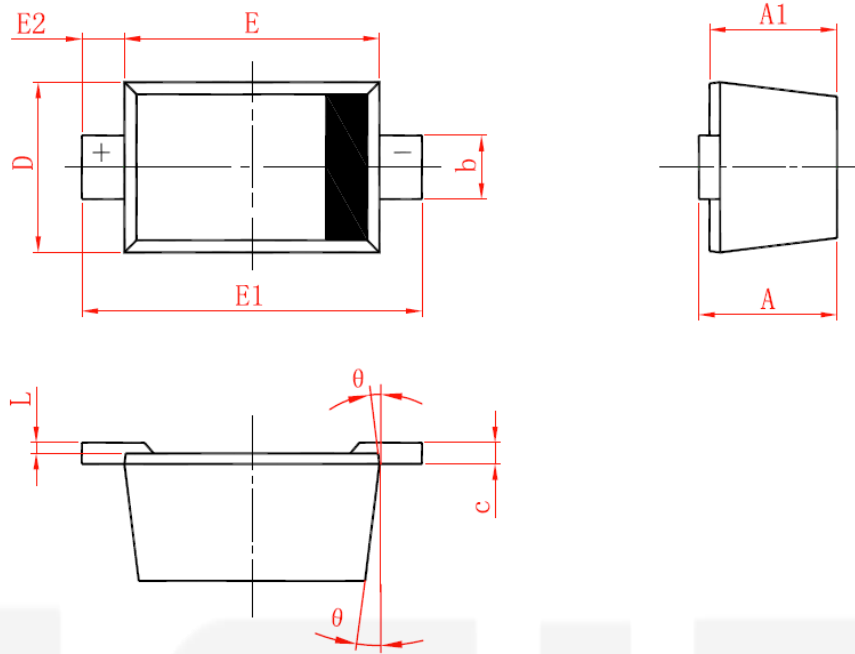

| Symbol | Dimensions in millimeter |       |       |
|--------|--------------------------|-------|-------|
|        | Min.                     | Typ.  | Max.  |
| A      | 0.510                    | 0.640 | 0.770 |
| A1     | 0.500                    | 0.600 | 0.700 |
| b      | 0.250                    | 0.300 | 0.350 |
| c      | 0.080                    | 0.115 | 0.150 |
| D      | 0.750                    | 0.800 | 0.850 |
| E      | 1.100                    | 1.200 | 1.300 |
| E1     | 1.500                    | 1.600 | 1.700 |
| E2     | 0.200 Ref                |       |       |
| L      | 0.010                    | 0.040 | 0.070 |
| θ      | 7° Ref                   |       |       |

Recommend land pattern (Unit: mm)

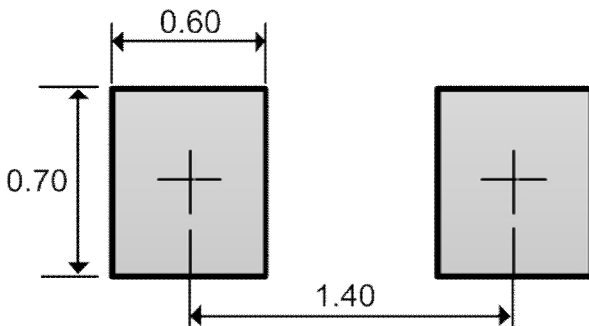

Note: This land pattern is for your reference only. Actual pad layouts may vary depending on application.